

KDP / DG Grand Stand Merchandiser (GSM) - Assembly Instructions

JOB 17725




Scan the QR code or visit the web address directly to view the **assembly video**: displaybuilds.com/instructions_17325




A Base 1	B Base Support Frame 1	C Side Frame 2	D Side Bottom Shelf 2	E Base Center Shelf 1	F Top Shelf 1
G Round Tube 2	H Top Table 1	I Side Upper Shelf 2	J M6*30 Screw 7	K M6*35 Screw 5	L M6*10 26
M Countersunk Screw 5	N M6 Allen Key 1	O Leveling Feet 12	P Side Panels 2		


1 Place (A) Base upside down and install x12 (O) Leveling Feet. Then flip over (A) Base to stand on feet and attach the (B) Base Support Frame with x2 (J) M6*30 Screws.

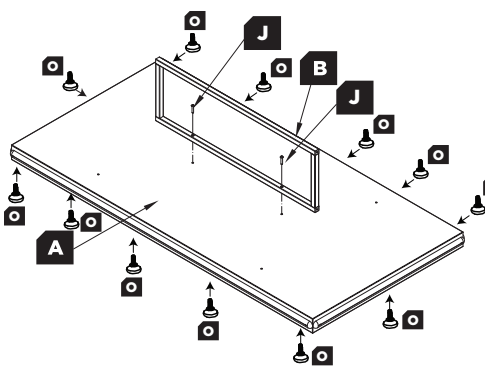

2 Attach the left and right (C) Side Frames to the (A) Base with x4 (J) M6*30 Screws (x2 per side).

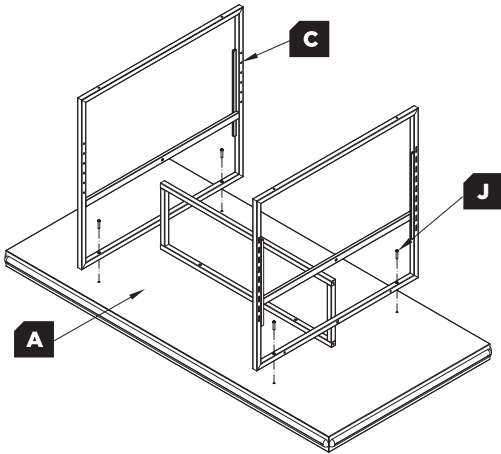


3 Secure (B) Base Support Frame to (C) Side Frames with x2 (K) M6*35 Screws (x1 per side).

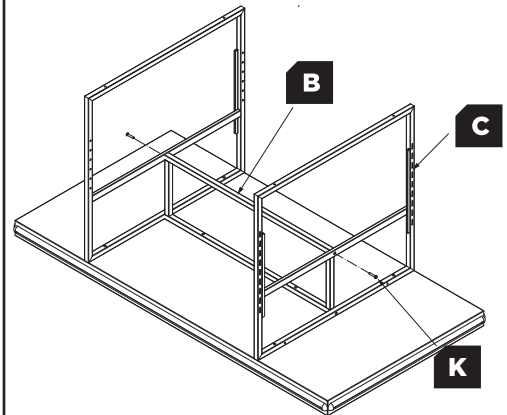


4 Attach the (D) Side Bottom Shelves to the (C) Side Frames with x4 (L) M6*10 Screws near the outer edges of each shelf (x2 per shelf). Then tighten x2 (K) M6*35 Screws in the middle of the shelf passing through (C) Side Frame into the (B) Base Support Frame (x1 screw per shelf).

NOTE: (D) Side Bottom Shelf "sits" on the (A) Base.

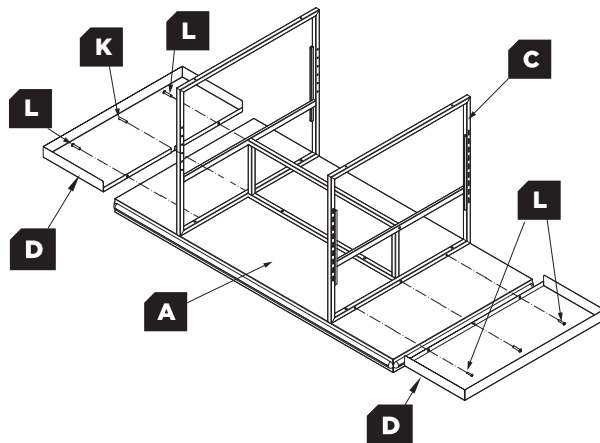

5 Thread x4 (L) M6*10 Screws at equal heights as required for product fitment. DO NOT TIGHTEN them, leaving a 3mm gap for shelf placement in the next step.

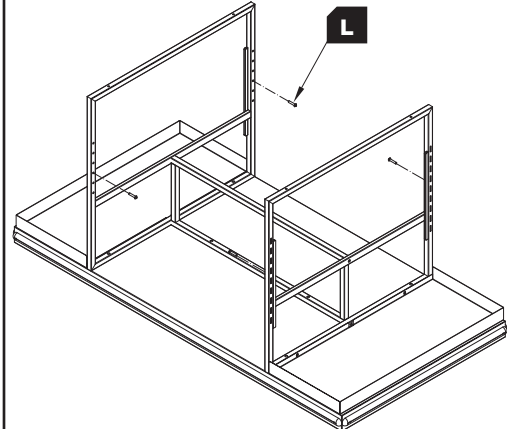





Scan the QR code or visit the web address directly to view the **assembly video**: displaybuilds.com/instructions_17325




6 Sit the (E) Base Center Shelf onto the screws placed in the (C) Side Frames, then tighten the screws completely. Slide (P) Side Panels into the center channels on the (C) Side Frames.

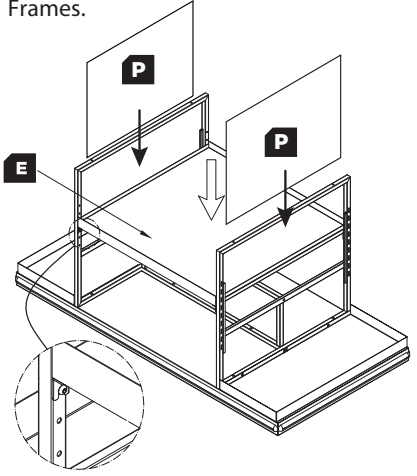


7 Attach the (F) Top Shelf to the (C) Side Frames with x4 (M) Countersunk Screws (x2 into each (C) Side Frame).

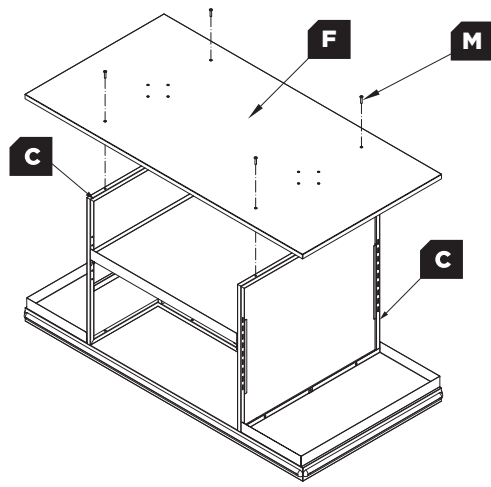



8 Attach the square base on the (G) Round Tubes to the (H) Top Table with x8 (L) M6*10 Screws (x4 screws per (G) Round Tube).

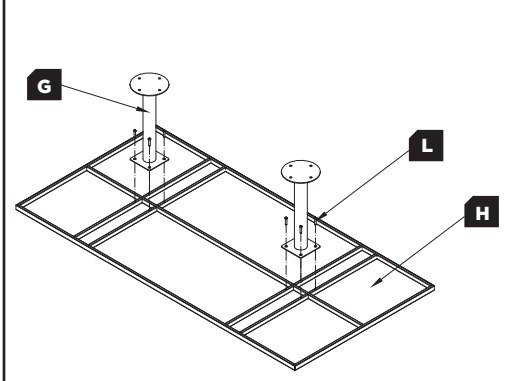

9 Place the (G & H) Top Table onto the (F) Top Shelf and align the holes. Fasten with x8 (L) M6*10 Screws through (G) Round Tube into (F) Top Shelf (x4 screws per side).

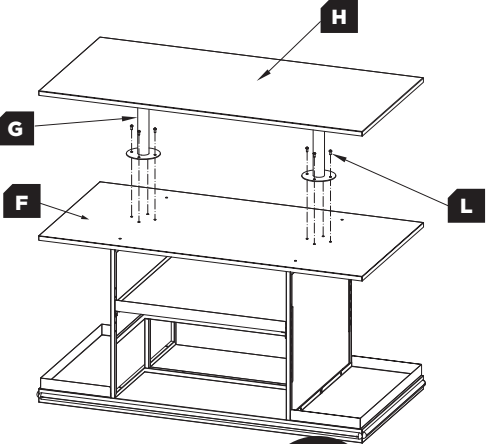

10 Hook the two (I) Side Upper Shelves into the (C) Side Frames at the position required (one shelf per side).

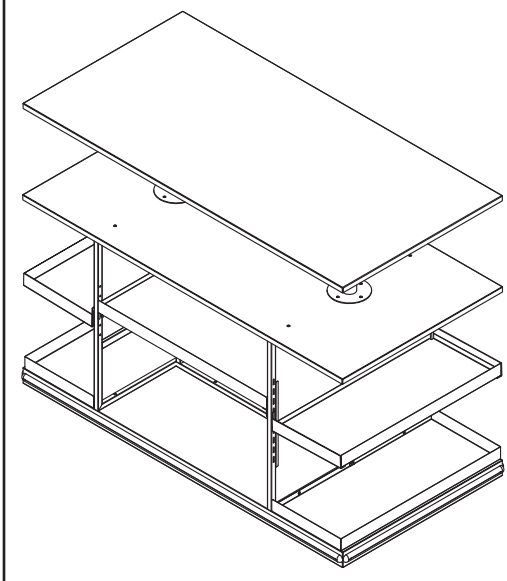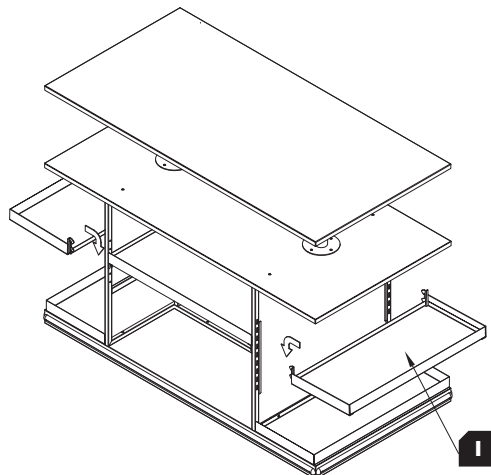

MISSING PARTS / DAMAGE CLAIM INSTRUCTIONS

- 1. DO NOT discard the box or original packaging.**
In the case of damaged goods caused by shipping, photo evidence will be required.
- 2. Take photos of the box & markings.**
A photo of the markings (text) on the side of the box is required for all cases in which a replacement part is needed. This helps to identify the item number and ensures the correct parts are pulled.
- 3. Take photos of damage (if applicable).**
A photo of the damaged part(s) is always required to file a claim and expediently process the replacement part. Please make sure you keep the box even if it is damaged.
- 4. Send an email with the images requested.**
Email a description of the claim along with the images required above at displaybuilds.com/contact or directly to help@displaybuilds.com. Call our toll-free number 1-866-308-8368 for further assistance.