
















# Coca-Cola / Circle K Cooler End Cap - Assembly Instructions

JOB 18528




Scan the QR code or visit the web address directly to view the assembly video: [displaybuilds.com/instructions\\_18528](http://displaybuilds.com/instructions_18528)




<b>A</b>  Base 1	<b>B</b>  Bottom Frame 1	<b>C</b>  Top Frame 1	<b>D</b>  Header Frame 1	<b>E</b>  Shelf 4	<b>F</b>  Bracket 2
<b>G</b>  Back Panel 2	<b>H</b>  Shelf POS - Side 8	<b>J</b>  Header POS 1	<b>L</b>  Cap Nut 2	<b>N</b>  Bolt 2	<b>O</b>  Allen Key 1
<b>I</b>  Shelf POS - Front 4	<b>K</b>  Base POS 1	<b>M</b>  Magnet 2			


**1** Insert (B) Bottom Frame into (A) Base and secure using x4 (N) Bolts. Tighten with (O) Allen Key.

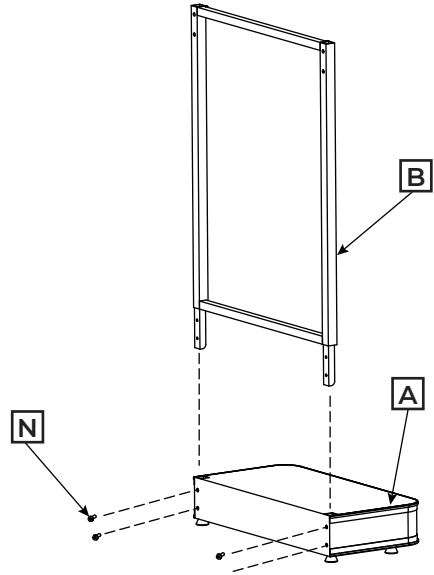


**2** Insert (C) Top Frame into (B) Bottom Frame and secure using x4 (N) Bolts. Tighten with (O) Allen Key.

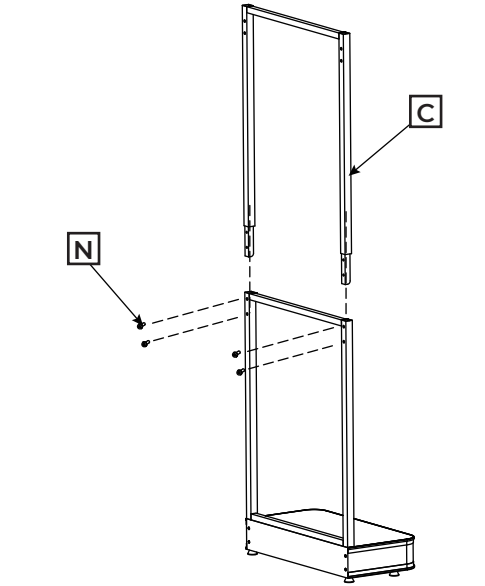


**3** Insert x2 (G) Back Panels into channel slides on (B/C) Back Frame and slide all the way down.

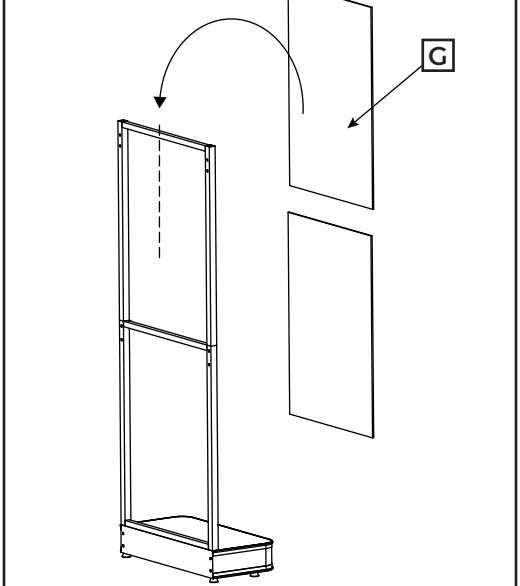


**4** Install x4 (E) Shelves at height positions as required for product fitment.

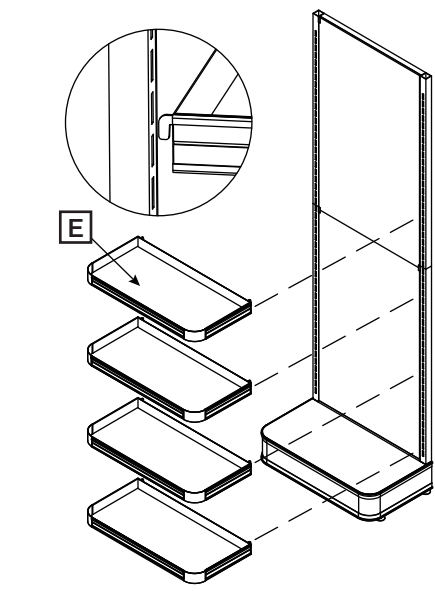

**5** Hook (D) Header Frame onto (C) Top Frame as shown.

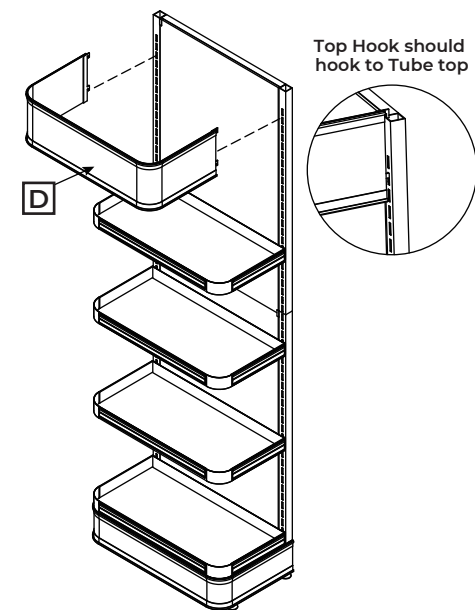

**6** Insert the all POS panels by sliding into the corresponding channel slides: (J) Header POS into (D) Header Frame (H) Shelf POS - Side into (E) Shelf Side (I) Shelf POS Front into (E) Shelf Front (K) Base POS into (A) Base.

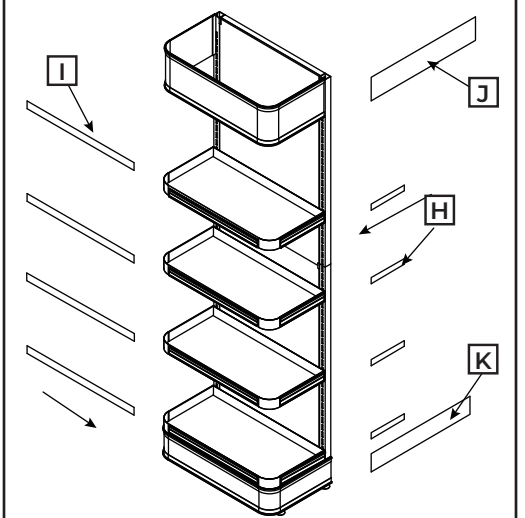

# Coca-Cola / Circle K Cooler End Cap - Assembly Instructions


JOB 18528




Scan the QR code or visit the web address directly to view the assembly video: [displaybuilds.com/instructions\\_18528](https://displaybuilds.com/instructions_18528)





- 7** Attach x2 (F) Brackets to the (C) Top Frame with x4 (N) Bolts as shown; then tighten with (O) Allen Key.

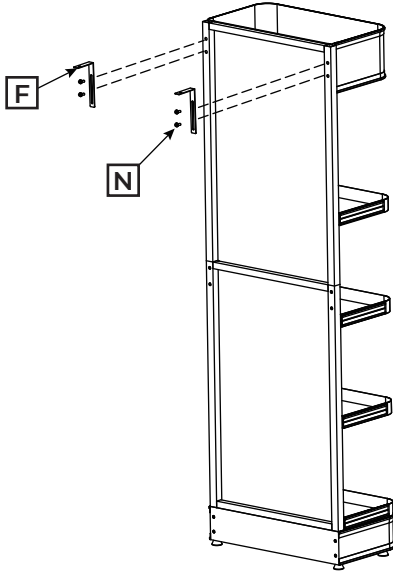


- 8** Insert x2 (M) Magnets into the x2 (F) Brackets with (M) Magnet facing down. Secure with x2 (L) Cap Nuts.

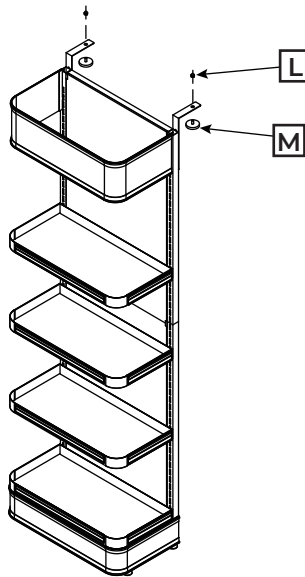

- 9** Place the assembled display against either side of the cooler and adjust the position of the (F) Brackets so that the (M) Magnets adhere to the top of the cooler.

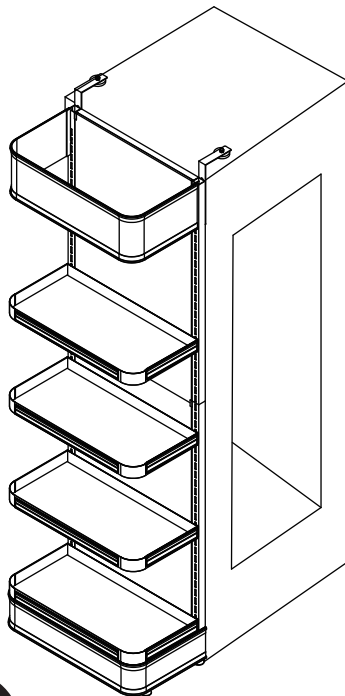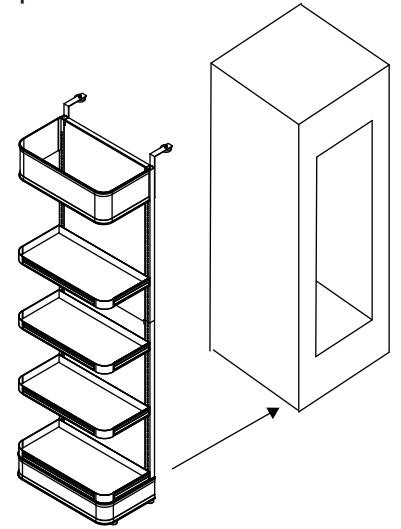

OR

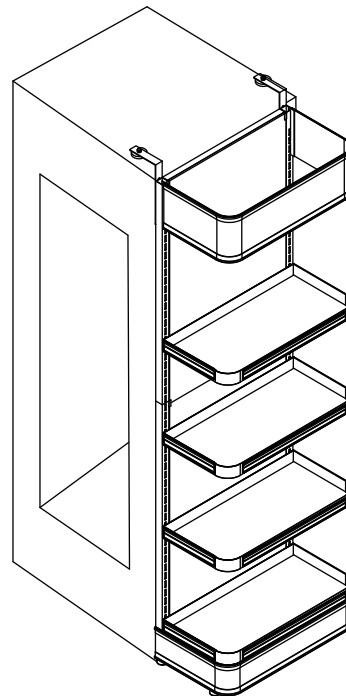

## MISSING PARTS / DAMAGE CLAIM INSTRUCTIONS

1. **DO NOT** discard the box or original packaging.

In the case of damaged goods caused by shipping, photo evidence will be required.

2. Take photos of the box & markings.

A photo of the markings (text) on the side of the box is required for all cases in which a replacement part is needed. This helps to identify the item number and ensures the correct parts are pulled.

3. Take photos of damage (if applicable).

A photo of the damaged part(s) is always required to file a claim and expediently process the replacement part. Please make sure you keep the box even if it is damaged.

4. Send an email with the images requested.

Email a description of the claim along with the images required above at [displaybuilds.com/contact](https://displaybuilds.com/contact) or directly to [help@displaybuilds.com](mailto:help@displaybuilds.com). Call our toll-free number 1-866-308-8368 for further assistance.